



**2200**  
Branch & Small Office Solution—  
Enterprise security in a  
desktop package

# Check Point 2200 Appliance

Today the Internet gateway is more than a firewall. It is a security device presented with an ever-increasing number of sophisticated threats. As a security gateway it must use multiple technologies to control network access, detect sophisticated attacks and provide additional security capabilities like data loss prevention and protection from web-based threats. The proliferation of mobile devices like smartphones and Tablets and new streaming, social networking and P2P applications requires a higher connection capacity and new application control technologies. Finally, the shift towards enterprise private and public cloud services, in all its variations, changes the company borders and requires enhanced capacity and additional security solutions.

Check Point's new appliances combine fast networking technologies with high performance multi-core capabilities—providing the highest level of security without compromising on network speeds to keep your data, network and employees secure. Optimized for the Software Blades Architecture, each appliance is capable of running any combination of Software Blades—providing the flexibility and the precise level of security for any business at every network location by consolidating multiple security technologies into a single integrated solution.

Each Check Point Appliance supports the Check Point 3D security vision of combining policies, people and enforcement for unbeatable protection and is optimized for enabling any combination of the following Software Blades: (1) Firewall, (2) VPN, (3) IPS, (4) Application Control, (5) Mobile Access, (6) DLP, (7) URL Filtering, (8) Antivirus, (9) Anti-spam, (10) Identity Awareness and (11) Advanced Networking & Clustering.

## OVERVIEW

The Check Point 2200 Appliance is a compact desktop box using multi-core technology. The 2200 offers six onboard 1 Gigabit copper Ethernet ports for high network throughput. Despite its small form factor, this powerful appliance provides a respectable 114 SecurityPower Units, firewall throughput of 3 Gbps and IPS throughput of more than 2 Gbps, enabling security for small branch offices, providing an effective and affordable all-in-one security solution.

## KEY FEATURES

- 114 SecurityPower™
- 3 Gbps of firewall throughput
- 2 Gbps of IPS throughput
- 6 10/100/1000Base-T ports
- Desktop form factor

## KEY BENEFITS

- Trusted by 100% of the Fortune 100
- All-inclusive security appliance
- Unified management console
- Ensures data security with VPN
- Extensible Software Blade Architecture

## GATEWAY SOFTWARE BLADES


|  | 2205 | 2207 | 2208 | 2210 |
|--|------|------|------|------|
| Firewall                               | ■    | ■    | ■    | ■    |
| IPsec VPN                              | ■    | ■    | ■    | ■    |
| Mobile Access<br>(5 users)             | ■    | ■    | ■    | ■    |
| Advanced<br>Networking<br>& Clustering | ■    | ■    | ■    | ■    |
| Identity<br>Awareness                  | ■    | ■    | ■    | ■    |
| IPS                                    | *    | ■    | ■    | ■    |
| Application<br>Control                 | *    | ■    | ■    | ■    |
| Data Loss<br>Prevention                | *    | *    | ■    | *    |
| URL Filtering                          | *    | *    | *    | ■    |
| Antivirus                              | *    | *    | *    | ■    |
| Anti-spam                              | *    | *    | *    | ■    |
| Anti-Bot                               | *    | *    | *    | *    |

\* Optional



## 2200

- ① Rack mount shelf (optional)
- ② 6 x 10/100/1000Base-T RJ45 ports
- ③ Two USB ports for ISO installation
- ④ Console port RJ45

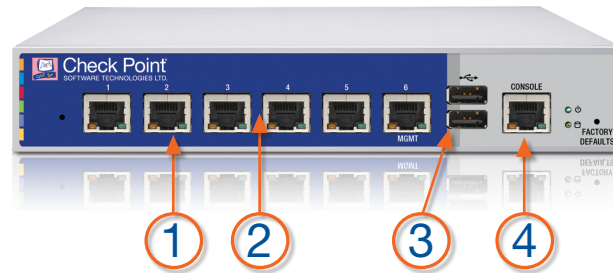

## SECURITYPOWER™

Until today security appliance selection has been based upon selecting specific performance measurements for each security function, usually under optimal lab testing conditions and using a security policy that has one rule. Today customers can select security appliances by their SecurityPower™ ratings which are based on real-world customer traffic, multiple security functions and a typical security policy.

SecurityPower is a new benchmark that measures the capability and capacity of an appliance to perform multiple advanced security functions (Software Blades) such as IPS, DLP and Application Control in real world traffic conditions. This provides an effective metric to better predict the current and future behavior of appliances under security attacks and in day-to-day operations. Customer SecurityPower Unit (SPU) requirements, determined using the Check Point Appliance Selection Tool, can be matched to the SPU ratings of Check Point Appliances to select the right appliance for their specific requirements.

## ALL-INCLUSIVE SECURITY SOLUTION

The Check Point 2200 Appliance offers a complete and consolidated security solution in a desktop form factor. Based on the Check Point Software Blade architecture, this appliance is available in four Software Blade packages of 5, 7, 8 and 10 Blades, and extensible to include additional Software Blades for further security protection.

## INTEGRATED SECURITY MANAGEMENT

The appliance can either be managed locally with its available integrated security management or via central unified management. Using local management, the appliance can manage itself and one adjacent appliance for high availability purposes.

## GAiA – THE UNIFIED SECURITY OS

Check Point GAiA™ is the next generation Secure Operating System for all Check Point appliances, open servers and virtualized gateways. GAiA combines the best features from IPSO and SecurePlatform into a single unified OS providing greater efficiency and robust performance. By upgrading to GAiA, customers will benefit from improved appliance connection capacity and reduced operating costs. With GAiA, customers will gain the ability to leverage the full breadth and power of all Check Point Software Blades. GAiA secures IPv4 and IPv6 networks utilizing the Check Point Acceleration & Clustering technology and it protects the most complex network environments by supporting dynamic routing protocols like RIP, OSPF, BGP, PIM (sparse and dense mode) and IGMP. As a 64-Bit OS, GAiA increases the connection capacity of select appliances.

GAiA simplifies management with segregation of duties by enabling role-based administrative access. Furthermore, GAiA greatly increases operation efficiency by offering Automatic Software Updates. The intuitive and feature-rich Web interface allows for instant search of any commands or properties. GAiA offers full compatibility with IPSO and SecurePlatform command line interfaces, making it an easy transition for existing Check Point customers.



## TECHNICAL SPECIFICATIONS

| Base Configuration                                 |
|--|
| 6 x 10/100/1000Base-T RJ45 ports                   |
| 250 GB hard disk drive                             |
| External AC to DC power adaptor                    |
| Performance  |
| 114 SecurityPower <sup>1</sup>                     |
| 3 Gbps of firewall throughput, 1518 byte UDP       |
| 400 Mbps of VPN throughput, AES-128                |
| 2 Gbps of IPS throughput Default IPS profile       |
| 300 Mbps of IPS throughput Recommended IPS profile |
| 1.2 million concurrent connections                 |
| 25,000 connections per second                      |
| Network Connectivity                               |
| IPv4 and IPv6                                      |
| 1024 VLANs   |
| 256 VLANs per interface                            |
| 802.3ad passive and active link aggregation        |
| Layer 2 (transparent) and Layer 3 (routing) mode   |
| High Availability                                  |
| Active/Active - L3 mode                            |
| Active/Passive - L3 mode                           |
| Session synchronization for firewall and VPN       |
| Session failover for routing change                |
| Device failure detection                           |
| ClusterXL or VRRP                                  |
| Link failure detection                             |

<sup>1</sup> SecurityPower: A metric to measure appliance performance based on real world traffic given the deployed software blades. Find the right appliance for your performance and security needs.

| Virtual Systems  |
|--|
| Max VSs: 3   |
| Dimensions   |
| Enclosure: Desktop                                     |
| Standard (W x D x H): 8.27 x 8.25 x 1.65 in.           |
| Metric (W x D x H): 210 x 209.5 x 42 mm                |
| Weight: 2.0 kg (4.4 lbs.)                              |
| Power Requirements                                     |
| AC Input Voltage: 100 - 240V                           |
| Frequency: 50 - 60 Hz                                  |
| Single Power Supply Rating: 40 W                       |
| Power Consumption Maximum: 35 W                        |
| Maximum thermal output: 119.4 BTU                      |
| Operating Environmental Conditions                     |
| Temperature: 32° to 104°F / 0° to 40°C                 |
| Humidity: 20% - 90% (non-condensing)                   |
| Storage Environmental Conditions                       |
| Temperature: -4° to 158°F / -20° to 70°C               |
| Humidity: 5% - 95% @ 60°C (non-condensing)             |
| Certifications   |
| Safety: CB, UL/cUL, CSA, TUV, NOM, CCC, IRAM, PCT/GoST |
| Emissions: FCC, CE, VCCI, C-Tick, CCC, ANATEL, KCC     |
| Environmental: RoHS                                    |



## SOFTWARE BLADE PACKAGES SPECIFICATIONS

| Base Systems  | SKU                     |
|---|-------------------------|
| 2200 Appliance with 5 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users blades). Bundled with local management for up to 2 gateways.   | CPAP-SG2205             |
| 2200 Appliance with 7 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control blades). Bundled with local management for up to 2 gateways.   | CPAP-SG2207             |
| 2200 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades). Bundled with local management for up to 2 gateways.  | CPAP-SG2208             |
| 2200 Appliance with 10 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Antivirus, and Email Security blades). Bundled with local management for up to 2 gateways.                        | CPAP-SG2210             |
| 2200 Appliance with 5 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users blades). Bundled with local management for up to 2 gateways. For High Availability.  | CPAP-SG2205-HA          |
| 2200 Appliance with 7 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control blades). Bundled with local management for up to 2 gateways. For High Availability.  | CPAP-SG2207-HA          |
| 2200 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades). Bundled with local management for up to 2 gateways. For High Availability.   | CPAP-SG2208-HA          |
| 2200 Appliance with 10 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Antivirus, and Email Security blades). Bundled with local management for up to 2 gateways. For High Availability. | CPAP-SG2210-HA          |
| <b>Software Blades Packages</b>   |                         |
| Check Point Extended Security Software Blades Package for 1 year for 2200 appliance (including IPS, URL Filtering, Application Control, Antivirus, Email Security, and DLP blades).   | CPSB-ESEC-6B-2200-1Y    |
| Check Point UTM+ Software Blades Package for 1 year for 2200 appliance (including IPS, URL Filtering, Application Control, Antivirus, and Email Security blades).   | CPSB-UTMP-5B-2200-1Y    |
| Check Point Extended Threat Protection Software Blades Package for 1 year for 2200 (including Application Control and IPS blades).  | CPSB-ETPR-2B-2200-1Y    |
| Check Point DLP+ Software Blades Package for 1 year for 2200 appliance (including IPS, Application Control, and DLP).   | CPSB-DLPP-3B-2200-1Y    |
| Check Point Web Control Software Blades Package for 1 year for 2200 (including Application Control and URL Filtering blades).   | CPSB-WBCL-2B-2200-1Y    |
| Check Point Anti-Malware Package for 1 year for 2200 (including Anti-Bot and AV blades)   | CPSB-ABAV-2B-2200-1Y    |
| Check Point Extended Security Software Blades Package for 1 year for 2200 appliance (including IPS, URL Filtering, Application Control, Antivirus, Email Security, and DLP blades) for High Availability  | CPSB-ESEC-6B-2200-1Y-HA |
| Check Point UTM+ Software Blades Package for 1 year for 2200 appliance (including IPS, URL Filtering, Application Control, Antivirus, and Email Security blades) for High Availability.   | CPSB-UTMP-5B-2200-1Y-HA |
| Check Point Extended Threat Protection Software Blades Package for 1 year for 2200 (including Application Control and IPS blades) for High Availability.  | CPSB-ETPR-2B-2200-1Y-HA |
| Check Point DLP+ Software Blades Package for 1 year for 2200 appliance (including IPS, Application Control, and DLP) for High Availability  | CPSB-DLPP-3B-2200-1Y-HA |
| Check Point Web Control Software Blades Package for 1 year for 2200 (including Application Control and URL Filtering blades) for High Availability.   | CPSB-WBCL-2B-2200-1Y-HA |
| Check Point Anti-Malware Package for 1 year for 2200 (including Anti-Bot and AV blades) - for High Availability   | CPSB-ABAV-2B-2200-1Y-HA |



## Datasheet: Check Point 2200 Appliance

| <b>Additional Software Blades</b>   |                    |
|---|--------------------|
| Check Point Mobile Access Blade for up to 50 concurrent connections   | CPSB-MOB-50        |
| Data Loss Prevention Blade for 1 year (for up to 500 users, up to 15,000 mails per hour and max throughput of 700 Mbps)                       | CPSB-DLP-500-1Y    |
| Check Point IPS blade for 1 year  | CPSB-IPS-S-1Y      |
| Check Point Application Control blade for 1 year  | CPSB-APCL-S-1Y     |
| Check Point URL Filtering blade for 1 year  | CPSB-URLF-S-1Y     |
| Check Point Antivirus Blade for 1 year  | CPSB-AV-S-1Y       |
| Check Point Anti-Spam & Email Security Blade for 1 year   | CPSB-ASPM-1Y       |
| Check Point Anti-Bot Blade for 1 year - for low-end appliances and pre-defined systems  | CPSB-ABOT-S-1Y     |
| Check Point Mobile Access Blade for up to 50 concurrent connections for High Availability   | CPSB-MOB-50-HA     |
| Data Loss Prevention Blade for 1 year (for up to 500 users, up to 15,000 mails per hour and max throughput of 700 Mbps) for High Availability | CPSB-DLP-500-1Y-HA |
| Check Point IPS blade for 1 year for High Availability  | CPSB-IPS-S-1Y-HA   |
| Check Point Application Control blade for 1 year for High Availability  | CPSB-APCL-S-1Y-HA  |
| Check Point URL Filtering blade for 1 year for High Availability  | CPSB-URLF-S-1Y-HA  |
| Check Point Antivirus Blade for 1 year for High Availability  | CPSB-AV-S-1Y-HA    |
| Check Point Anti-Spam & Email Security Blade for 1 year for High Availability   | CPSB-ASPM-1Y-HA    |
| Check Point Anti-Bot Blade for 1 year - for low-end appliances and pre-defined systems - for High Availability                                | CPSB-ABOT-S-1Y-HA  |

## ACCESSORIES

| <b>Description</b>                             | <b>SKU</b>    |
|--|---------------|
| Replacement DC Power Supply for 2200 appliance | CPAC-PSU-2200 |
| Rack mount shelf                               |               |

## CONTACT CHECK POINT

### Worldwide Headquarters

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

### U.S. Headquarters

800 Bridge Parkway, Redwood City, CA 94065 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com