



12400
Datacenter-grade security appliance (1046 SPU/25Gbps) for fast networking performance

Check Point 12400 Appliance

Today the enterprise gateway is more than a firewall. It is a security device presented with an ever-increasing number of sophisticated threats. As an enterprise security gateway it must use multiple technologies to control network access, detect sophisticated attacks and provide additional security capabilities like data loss prevention and protection from web-based threats. The proliferation of mobile devices like smartphones and Tablets and new streaming, social networking and P2P applications requires a higher connection capacity and new application control technologies. Finally, the shift towards enterprise private and public cloud services, in all its variations, changes the company borders and requires enhanced capacity and additional security solutions.

Check Point's new appliances combine fast networking technologies with high performance multi-core capabilities—providing the highest level of security without compromising on network speeds to keep your data, network and employees secure. Optimized for the Software Blades Architecture, each appliance is capable of running any combination of Software Blades—providing the flexibility and the precise level of security for any business at every network location by consolidating multiple security technologies into a single integrated solution.

Each Check Point Appliance supports the Check Point 3D security vision of combining policies, people and enforcement for unbeatable protection and is optimized for enabling any combination of the following Software Blades: (1) Firewall, (2) VPN, (3) IPS, (4) Application Control, (5) Mobile Access, (6) DLP, (7) URL Filtering, (8) Antivirus, (9) Anti-spam, (10) Anti-Bot, (11) Identity Awareness and (12) Advanced Networking & Clustering.

OVERVIEW

With high security Software Blades performance and great scalability, the 12400 Appliance is a datacenter-grade platform offering advanced redundancy and modularity. In addition to two onboard 1 Gigabit copper Ethernet ports, three available expansion slots can be used to configure a variety of network options such as 1 Gigabit Ethernet copper, 1 Gigabit Ethernet fiber, and 10 Gigabit Ethernet fiber connections.

The 12400 default configuration includes an eight 1 Gigabit Ethernet copper expansion card. Fully loaded, the 12400 supports up to twenty-six 1 Gigabit Ethernet ports or twelve 10 Gigabit Ethernet ports.

KEY FEATURES

- 1046 SecurityPower™
- 25 Gbps of firewall throughput
- 12 Gbps of IPS throughput
- High port density with up to 26 ports
- Dual redundant hot swappable power supplies
- Lights-Out-Management

KEY BENEFITS


- Datacenter-grade appliance optimized for multiple Software Blades performance
- All-inclusive security appliance
- Simplifies administration with a single integrated management console
- Extensible Software Blade Architecture
- Ensures data security for remote access and site-to-site communications

GATEWAY SOFTWARE BLADES

	12407	12408	12409	12410
Firewall	■	■	■	■
IPsec VPN	■	■	■	■
Mobile Access (5 users)	■	■	■	■
Advanced Networking & Clustering	■	■	■	■
Identity Awareness	■	■	■	■
IPS	■	■	■	■
Application Control	■	■	*	■
Data Loss Prevention	*	■	*	*
URL Filtering	*	*	■	■
Antivirus	*	*	■	■
Anti-spam	*	*	*	■
Anti-Bot	*	*	■	*

*Optional



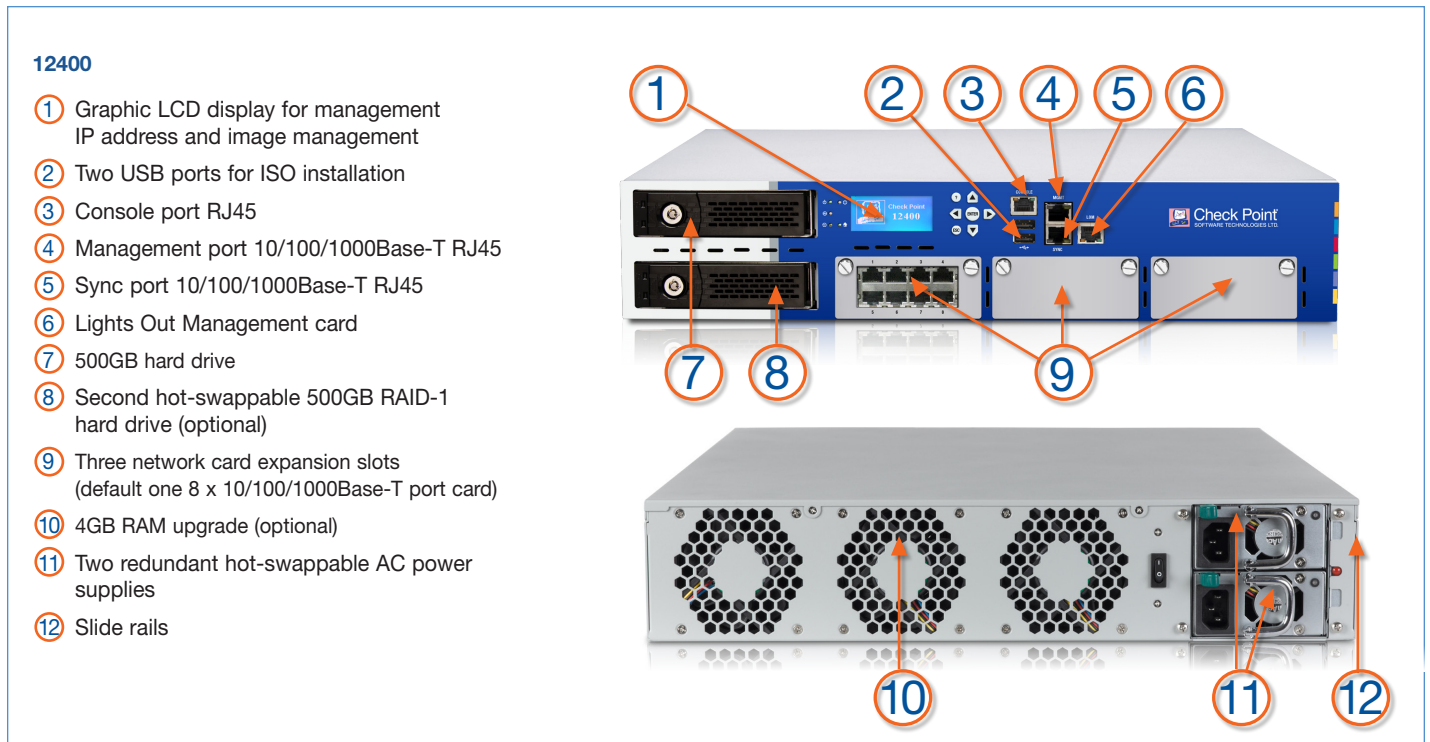

The 12400 includes Lights-Out-Management, hot-swappable power supplies and optional hot-swappable redundant disk drives.

With 1046 SecurityPower Units, the 12400 Appliance offers superior performance with a firewall throughput of 25 Gbps and IPS throughput of 12 Gbps, all in a two rack unit (2RU) purpose-built security appliance.

SECURITYPOWER™

Until today security appliance selection has been based upon selecting specific performance measurements for each security function, usually under optimal lab testing conditions and using a security policy that has one rule. Today customers can select security appliances by their SecurityPower™ ratings which are based on real-world customer traffic, multiple security functions and a typical security policy.

SecurityPower is a new benchmark that measures the capability and capacity of an appliance to perform multiple advanced security functions (Software Blades) such as IPS, DLP and Application Control in real world traffic conditions. This provides an effective metric to better predict the current and future behavior of appliances under security attacks and in day-to-day operations. Customer SecurityPower Unit (SPU) requirements, determined using the Check Point Appliance Selection Tool, can be matched to the SPU ratings of Check Point Appliances to select the right appliance for their specific requirements.

BUSINESS CONTINUITY, RELIABILITY AND EXTENSIBILITY

The Check Point 12400 appliance delivers business continuity and serviceability through features such as hot-swappable redundant power supplies, hot-swappable redundant hard disk drives (RAID) and an advanced LOM card for out-of-band management. Combined together, these features ensure a greater degree of business continuity and serviceability when these appliances are deployed in customer networks.

INTEGRATED SECURITY MANAGEMENT

The appliance can either be managed locally with its available integrated security management or via central unified management. Using local management, the appliance can manage itself and one adjacent appliance for high availability purposes.

REMOTE ACCESS CONNECTIVITY FOR MOBILE DEVICES

Each appliance arrives with mobile access connectivity for 5 users, using the Mobile Access Blade. This license will provide secure remote access to corporate resources from a wide variety of devices including smartphones, tablets, PCs, Mac and Linux.

REMOTE PLATFORM MANAGEMENT AND MONITORING

A Lights-Out-Management (LOM) card provides out-of-band remote management to remotely diagnose, start, restart and manage the appliance from a remote location. Administrators can also use the LOM web interface to remotely install an OS image from an ISO file.



GAiA – THE UNIFIED SECURITY OS

Check Point GAiA™ is the next generation Secure Operating System for all Check Point appliances, open servers and virtualized gateways. GAiA combines the best features from IPSO and SecurePlatform into a single unified OS providing greater efficiency and robust performance. By upgrading to GAiA, customers will benefit from improved appliance connection capacity and reduced operating costs. With GAiA, customers will gain the ability to leverage the full breadth and power of all Check Point Software Blades. GAiA secures IPv4 and IPv6 networks utilizing the Check Point Acceleration & Clustering technology and it protects the most complex

network environments by supporting dynamic routing protocols like RIP, OSPF, BGP, PIM (sparse and dense mode) and IGMP. As a 64-Bit OS, GAiA increases the connection capacity of select appliances.

GAiA simplifies management with segregation of duties by enabling role-based administrative access. Furthermore, GAiA greatly increases operation efficiency by offering Automatic Software Updates. The intuitive and feature-rich Web interface allows for instant search of any commands or properties. GAiA offers full compatibility with IPSO and SecurePlatform command line interfaces, making it an easy transition for existing Check Point customers.

TECHNICAL SPECIFICATIONS

Base Configuration
2 on board 1GbE copper interface
8x1GbE copper interfaces card (for 1 of the 3 expansion slots)
4 GB memory
Redundant dual hot-swappable Power Supplies
500 GB hard disk drive
LOM card
Slide rails
Network Expansion Slot Options
4 x 10/100/1000Base-T RJ45 ports
8 x 10/100/1000Base-T RJ45 ports
2 x 1000Base-F SFP ports
4 x 1000Base-F SFP ports
2 x 10GBase-F SFP+ ports
4 x 10GBase-F SFP+ ports
Max Configuration
Up to 26 x 10/100/1000Base-T RJ45 ports
Up to 12 x 1000Base-F SFP ports
Up to 12 x 10GBase-F SFP+ ports
12 GB memory
2 x 500 GB HDD RAID-1
Performance
1046 SecurityPower ¹
25 Gbps of firewall throughput, 1518 byte UDP
3.5 Gbps of VPN throughput, AES-128
12 Gbps of IPS throughput Default IPS profile
3.5 Gbps of IPS throughput Recommended IPS profile
1.7 (default) / 5 (max) million concurrent connections
110,000 connections per second
Network Connectivity
IPv4 and IPv6
1024 VLANs
256 VLANs per interface
802.3ad passive and active link aggregation
Layer 2 (transparent) and Layer 3 (routing) mode

High Availability
Active/Active - L3 mode
Active/Passive - L3 mode
Session synchronization for firewall and VPN
Session failover for routing change
Device failure detection
Link failure detection
ClusterXL or VRRP
Virtual Systems
Max VSs: 25 (w/4GB), 75 (w/12GB)
Dimensions
Enclosure: 2RU
Standard (W x D x H): 17.24 x 22.13 x 3.46 in.
Metric (W x D x H): 438 x 562 x 88 mm
Weight: 23.4 kg (51.6 lbs.)
Power Requirements
AC Input Voltage: 100 - 240V
Frequency: 47-63 Hz
Single Power Supply Rating: 300 W
Power Consumption Maximum: 132 W
Maximum thermal output: 450.4 BTU
Operating Environmental Conditions
Temperature: 32° to 104°F / 0° to 40°C
Humidity: 20% - 90% (non-condensing)
Storage Conditions
Temperature: -4° to 158°F / -20° to 70°C
Humidity: 5% - 95% @ 60°C (non-condensing)
Certifications
Safety: CB, UL/cUL, CSA, TUV, NOM, CCC, IRAM, PCT/GoST
Emissions: FCC, CE, VCCI, C-Tick, CCC, ANATEL, KCC
Environmental: RoHS

¹ SecurityPower: A metric to measure appliance performance based on real world traffic given the deployed software blades. Find the right appliance for your performance and security needs.



SOFTWARE BLADE PACKAGE SPECIFICATIONS

Base Packages	SKU
12400 Appliance with 7 Security Software Blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, and Application Control Software Blades); bundled with local management for up to 2 gateways.	CPAP-SG12407
12400 Appliance with 8 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, Mobile Access for 5 concurrent users, IPS, Application Control, and DLP blades); bundled with local management for up to 2 gateways.	CPAP-SG12408
12400 Appliance with 9 Security blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, URL Filtering, Antivirus and Anti-Bot Security blades); bundled with local management for up to 2 gateways	CPAP-SG12409
12400 Appliance with 10 Security Software Blades (including Firewall, VPN, Advanced Networking & Clustering, Identity Awareness, and Mobile Access for 5 concurrent users, IPS, Application Control, URL Filtering, Antivirus, and Email Security Software Blades); bundled with local management for up to 2 gateways.	CPAP-SG12410
Software Blades Packages	SKU
Check Point Extended Security Software Blades Package for 1 year for 12400 appliance (including IPS, URL Filtering, Application Control, Antivirus, Email Security, and DLP blades).	CPSB-ESEC-6B-12400-1Y
Check Point UTM+ Software Blades Package for 1 year for 12400 appliance (including IPS, URL Filtering, Application Control, Antivirus, and Email Security Software Blades).	CPSB-UTMP-5B-12400-1Y
Check Point DLP+ Software Blades Package for 1 year for 12400 appliance (including IPS, Application Control, and DLP).	CPSB-DLPP-3B-12400-1Y
Check Point Extended Threat Protection Software Blades Package for 1 year for 12400 (including Application Control and IPS Software Blades).	CPSB-ETPR-2B-12400-1Y
Check Point Web Control Software Blades Package for 1 year for 12400 (including Application Control and URL Filtering Software Blades).	CPSB-WBCL-2B-12400-1Y
Check Point Anti-Malware Package for 1 year for 12400 (including Anti-Bot and AV blades).	CPSB-ABAV-2B-12400-1Y
Additional Software Blades	SKU
Check Point Mobile Access Software Blade for unlimited concurrent connections	CPSB-MOB-U
Data Loss Prevention Software Blade for 1 year (for 1,500 users and above, up to 250,000 mails per hour and maximum throughput of 2.5 Gbps)	CPSB-DLP-U-1Y
Check Point IPS Software Blade for 1 year	CPSB-IPS-L-1Y
Check Point Application Control Software Blade for 1 year	CPSB-APCL-L-1Y
Check Point URL Filtering Software Blade for 1 year	CPSB-URLF-L-1Y
Check Point Antivirus Software Blade for 1 year	CPSB-AV-L-1Y
Check Point Anti-Spam & Email Security Software Blade for 1 year	CPSB-ASPM-1Y
Check Point Anti-Bot blade for 1 year - for high-end appliances and pre-defined systems	CPSB-ABOT-L-1Y



ACCESSORIES

Interface Cards and Transceivers	SKU
4 Port 10/100/100 Base-T RJ45 interface card	CPAC-4-1C
8 Port 10/100/100 Base-T RJ45 interface card	CPAC-8-1C
4 Port 1000Base-F SFP interface card; requires additional 1000Base SFP transceiver modules per interface port	CPAC-4-1F
SFP transceiver module for 1G fiber ports – long range (1000Base-LX) for CPAC-4-1F	CPAC-TR-1LX
SFP transceiver module for 1G fiber ports – short range (1000Base-SX) for CPAC-4-1F	CPAC-TR-1SX
2 Port 10GBase-F SFP+ interface card; requires an additional 10GBase SFP+ transceiver per interface port	CPAC-2-10F
4 Port 10GBase-F SFP+ interface card; requires an additional 10GBase SFP+ transceiver per interface port	CPAC-4-10F
SFP+ transceiver module for 10G fiber ports – long range (10GBase-LR) for CPAC-2-10F, CPAC-4-10F	CPAC-TR-10LR
SFP+ transceiver module for 10G fiber ports – short range (10GBase-SR) for CPAC-2-10F, CPAC-4-10F	CPAC-TR-10SR
Spares and Miscellaneous	SKU
4GB RAM Memory upgrade for 12400 appliances	CPAC-RAM4GB-12400
Replacement parts kit (including 1 Hard Disk Drive, and one Power Supply) for 12400 appliance	CPAC-SPARES-12400
Replacement AC Power Supply for 12400 appliance	CPAC-PSU-12400
Additional/replacement 500G Hard Disk Drive for 12400 appliance	CPAC-HDD-500G
Slide RAILS for Check Point Appliances	CPAC-RAILS

CONTACT CHECK POINT

Worldwide Headquarters

5 Ha'Solelim Street, Tel Aviv 67897, Israel | Tel: 972-3-753-4555 | Fax: 972-3-624-1100 | Email: info@checkpoint.com

U.S. Headquarters

800 Bridge Parkway, Redwood City, CA 94065 | Tel: 800-429-4391; 650-628-2000 | Fax: 650-654-4233 | www.checkpoint.com